



## NEW AGE SOLUTIONS FOR NEW AGE CONSTRUCTION

[Website](#)

An ISO 9001 : 2008 Certified Company

**HI-BOND™**  
CHEMICAL  
ENGINEERED ADHESION



- **ADHESIVE**
- **GROUT**
- **WATERPROOFING**
- **SEALER**
- **ACCESSORIES**

ADHESIVE

# NSA PRO++

GRAY

## Product description:

NSA PRO++ is a smooth and creamy thin-set adhesive for installing small to medium format ceramic tiles, vitrified tiles wall & floor in interior areas. Applications.



## Application:

Designed for interior floor and wall application.

**Pack Size :** 20 kg

**Colour :** Grey

**Note :** The coverage will vary depending on trowel notch size, type, size of tile and substrate smoothness and evenness.

**Coverage :** For a 3 mm bed thickness & after using of notch trowel, the coverage approximately 40-50 sq.ft per 20 kg.

**Shelf Life :** 12 Month from the month & year of manufacturing when sealed packed & stored in proper (dry place) condition.

[www.hibondchem.com](http://www.hibondchem.com)



**20 kg.**

# EXCLUSIVE BONDING...




ADHESIVE

# NSA GOLD

GRAY

## Product Description:

NSA GOLD is a premium quality, polymer modified thin-set adhesive for fixing vitrified tiles, natural stone on variety of interior & exterior substrates for wall and floor applications.

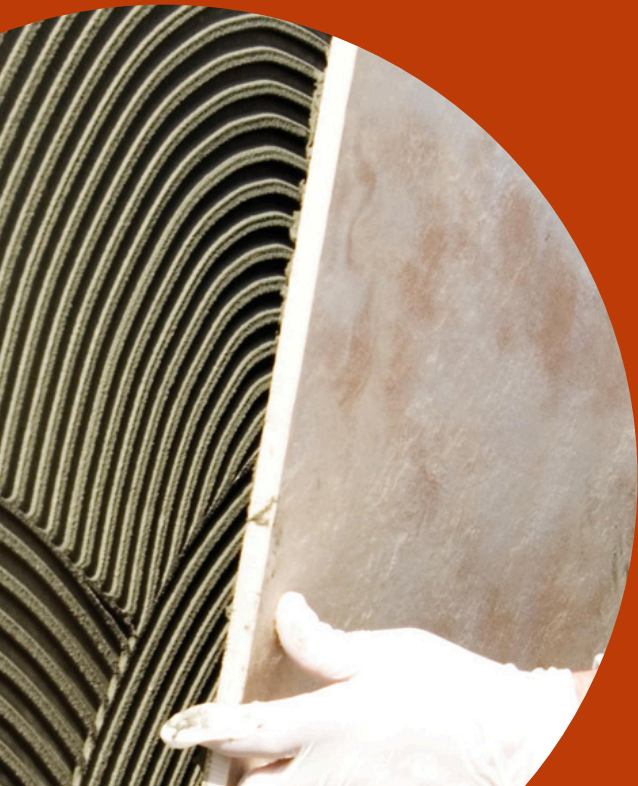

## Application:

Designed for interior floor and wall application of all types of ceramic, vitrified tiles, natural stone over concrete and a variety of sub.

**Pack Size :** 20 kg

**Colour :** Grey

**Note :** The coverage will vary depending on trowel notch size, type, size of tile and substrate smoothness and evenness.

**Coverage :** For a 3 mm bed thickness & after using of notch trowel, the coverage approximately 40-50 sq.ft per 20 kg.

**Shelf Life :** 12 Month from the month & year of manufacturing when sealed packed & stored in proper (dry place) condition.

[www.hibondchem.com](http://www.hibondchem.com)



**20 kg.**

# EXCLUSIVE BONDING...



ADHESIVE

# NSA DIAMOND

WHITE

## Product description:

NSA Diamond is a premium quality, high polymer modified thin-set adhesive for fixing vitrified tiles, natural stone on variety of interior & exterior substrates for wall and floor applications.

## Application:

Designed for interior floor and wall application of all types of ceramic, vitrified tiles, natural stone, glass mosaic over concrete and a variety of substrates.

**Pack Size :** 20 kg

**Colour :** white

**Note :** The coverage will vary depending on trowel notch size, type, size of tile and substrate smoothness and evenness.

**Coverage :** For a 3 mm bed thickness & after using of notch trowel, the coverage approximately 40-50 sq.ft per 20 kg.

**Shelf Life :** 12 Month from the month & year of manufacturing when sealed packed & stored in proper (dry place) condition.



**20 kg.**

# EXCLUSIVE BONDING...



ADHESIVE

# NSA PLATINUM

WHITE

## Product description:

NSA platinum is a premium quality, high polymer modified and multi-purpose thin-set adhesive for fixing vitrified tiles, slab tiles, natural stone, swimming pool tiles, marble on variety of interior & exterior substrates for wall and floor applications.



## Application:

Designed for interior floor and wall application of all types of ceramic, vitrified tiles, natural stone, marble, glass mosaic over concrete and a variety of substrates.

**Pack Size :** 20 kg

**Colour :** white

**Note :** The coverage will vary depending on trowel notch size, type, size of tile and substrate smoothness and evenness.

**Coverage :** For a 3 mm bed thickness & after using of notch trowel, the coverage approximately 40-50 sq.ft per 20 kg.

**Shelf Life :** 12 Month from the month & year of manufacturing when sealed packed & stored in proper (dry place) condition.

[www.hibondchem.com](http://www.hibondchem.com)



**20 kg.**

# EXCLUSIVE BONDING...




PU BASE ADHESIVE

# MULTI-FIX

## Product description:

Multi-fix PU based adhesive is two component, polyurethane-epoxy hybrid technology based, highly flexible, high-performance, multipurpose, thin-set adhesive for fixing all types of tiles & stone, metal & glass tiles interior & exterior floor & wall.

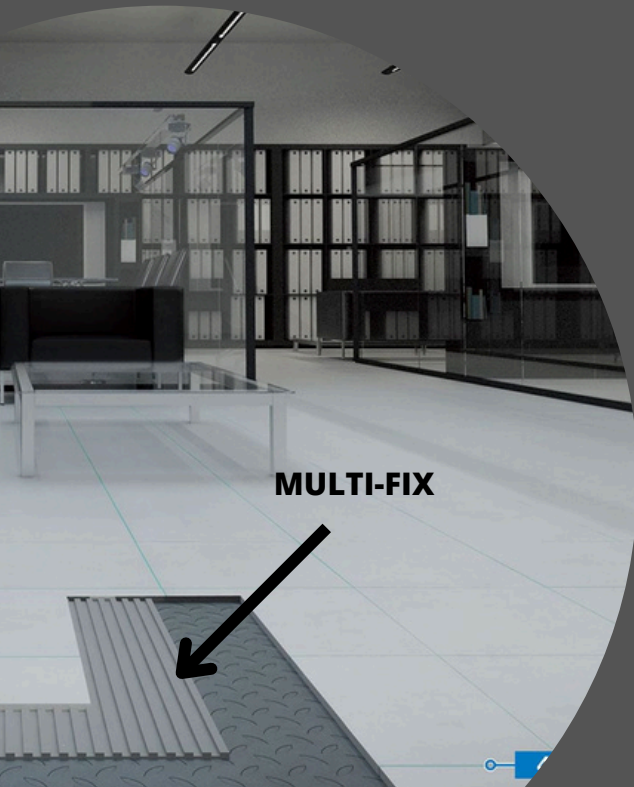

## Application:

Floor and walls, internal & external areas, window/door frame, vibrational area, kitchens, balconies, flat roofs, domes, terraces, commercial & industrial application.

**Pack Size :** 1 kg. & 4 kg.

**MIXING RATIO :** (04:01) This material is available in two part, Part A (pu Resin), Part B (pu Hardener). mix Parts A and B thoroughly and as the mixing becomes uniform, substrates with its proper appliances.

**Coverage :** 16-20 sq.ft/4 kg pack-1.5 mm bed thickness (use 3 mm x 3 mm notch.)

**Shelf Life :** 12 Month (Store in a off ground, cool, dry area in factory sealed packaging, high humidity may reduce shelf life of product.)



**1 kg. & 4 kg.**

# EXCLUSIVE BONDING...



ADHESIVE

# BLOCK-FIX

## Product description:

Block-fix is a dry powder based ready mix thin layer jointing mortar use for laying AAC block, fly ash bricks, cement blocks and red clay bricks etc.



## Application:

laying and jointing AAC blocks, jointing of pre-stressed concrete slabs, panels, parapet walls, jointing of cement window and door frames, garden, boundary walls etc..

**Pack Size :** 40 kg

**Colour :** Grey

**Note :** The coverage will vary depending on trowel notch size, type, size of blocks and substrate smoothness and evenness.

**Shelf Life :** 12 Month from the month & year of manufacturing when sealed packed & stored in proper (dry place) condition.

[www.hibondchem.com](http://www.hibondchem.com)



**40 kg.**

# EXCLUSIVE BONDING...



GROUT  
**TILES-GROUT**

**Product description:**

Tiles grout aqua seal is a superior quality and high polymer modified hydrophobic cement. For better performance it is recommended to use out with hi-bond latex additive mixture.



**Application:**

Used for filling Tiles grouting 1 mm to 4 mm in both interior and exterior areas.  
(kitchens, bathrooms, balconies, terraces, swimming-pools, showrooms...etc)

**Pack Size :** 500 gm (ship pack 20 pcs), 1 kg (ship pack 10 pcs)

**MIXING RATIO :** Use approx 300 ml-400 ml of water of latex additive mixture for 1 kg. (better performance use to 200 ml of additive per 1 kg. grout)

**Coverage :** Varies with tiles size and grout width.

**Shelf Life :** 12 Month from the month & year of manufacturing when sealed packed & stored in proper (dry place) condition.



**1 kg.**

**EXCLUSIVE  
BONDING...**



GROUT

# PREMIUM EPOXY GROUT

## Product description:

Premium epoxy grout is specifically designed for use in application of ceramic tile, vitrified tiles, marble, glass, stone where staining is expected.



## Application:

Used to fill gaps between ceramic, porcelain, vitrified tiles, natural stones, glass mosaics, and other surfaces. – It is perfect for grouting surfaces such as bathrooms, kitchens, living rooms, swimming pools, and commercial areas since it can be used in both dry and wet regions.

**Pack Size :** 1 kg.&5 kg.

**MIXING RATIO :** This material is available in three part, Part A (Resin), Part B (Hardener) and Part C (Filler), AT first. mix Parts A and B thoroughly and as the mixing becomes uniform, add Part C and make it a consistent paste. Then apply this paste to suubstrates ith itas proper appliances.

**Coverage :** Varies with tiles size and grout width.

**Shelf Life :** 12 Month (Store in a off ground, cool, dry area in factory sealed packaging, high humidity may reduce shelf life of product.)

[www.hibondchem.com](http://www.hibondchem.com)



**1 kg.& 5 kg.**

# EXCLUSIVE BONDING...




GROUT

# SPARKLE EPOXY GROUT

## Product description:

Sparkle epoxy grout is specifically designed for use in application of ceramic tile, vitrified tiles, marble, glass, stone where staining is expected.

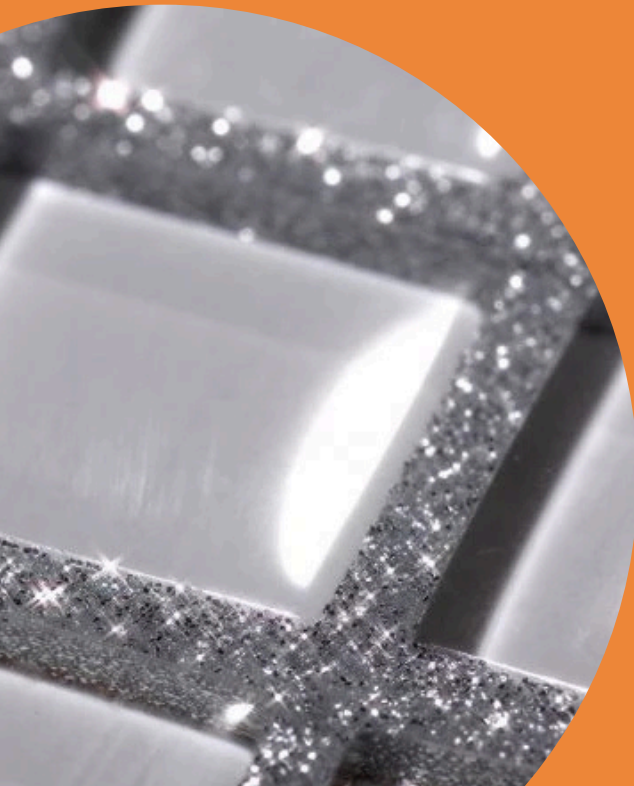

## Application:

Used to fill gaps between ceramic, porcelain, vitrified tiles, natural stones, glass mosaics, and other surfaces. – It is perfect for grouting surfaces such as bathrooms, kitchens, living rooms, swimming pools, and commercial areas since it can be used in both dry and wet regions.

**Pack Size :** 1 kg.&5 kg.

**MIXING RATIO :** This material is available in three part, Part A (Resin), Part B (Hardener) and Part C (Filler), AT first. mix Parts A and B thoroughly and as the mixing becomes uniform, add Part C and make it a consistent paste. Then apply this paste to suustrates ith itas proper appliances.

**Coverage :** Varies with tiles size and grout width.

**Shelf Life :** 12 Month (Store in a off ground, cool, dry area in factory sealed packaging, high humidity may reduce shelf life of product.)

[www.hibondchem.com](http://www.hibondchem.com)



**1 kg.& 5 kg.**

# EXCLUSIVE BONDING...



WATERPROOFING

# SBR LATEX

## Product description:

SBR LATEX is an acrylic polymer based high performance multipurpose effective coating system for repairs & waterproofing solution.



## Application:

waterproofing, repairing structures, surface treatment and protecting, excellent choice to use new and old substrate, can use bond coat mixing with cement mortar and concrete.

**Pack Size :** 200 ml, 500 ml, 1ltr, 5ltr & 20 ltr.

**colour :** Milky white liquid

**How to use :** All surfaces must be clean & dry. It is used as a bonding agent between old & new concrete, for cementitious substrates, waterproofing coating for small areas in bathrooms, balconies & roofs.

**MIXING RATIO:** As a Waterproof coating 1:1.5 (SBR:Cement), Pasivator coating & bond coat 1:1 (SBR:Cement)

**Shelf Life :** 12 Month (Store in a off ground, dry area in factory sealed packaging, high humidity may reduce shelf life of product.)

[www.hibondchem.com](http://www.hibondchem.com)



**200 ml. ,500ml. ,1ltr.& 5 ltr & 20 ltr.**

# EXCLUSIVE BONDING...



ADMIXER

# LATEX ADDITIVE

## Product description:

LATEX ADDITIVE is a liquid latex-based additives for cementitious tiles adhesive & grouts and is used to improve water resistance as well as bond strength & flexibility.



## Application:

Is a high quality, waer-based polymer emulsion for cement based tiles adhesive and grout, where a degree of flexibility, vibration resistance or increased adhsive strength.

**Pack Size :** 200 ml, 1 Ltr.

**colour :** milky white liquid

**How to use :** Use 1 kg, grout powder in approx 200 ml to 300 ml. latex additive mix and 20 kg. adhesive powder in approx 2 to 5 Ltr. additive mix.

**MIXING RATIO:** Add 200gm HI-bond latex additive to 1kg cementitious tile grout.

- (2) Mix it thoroughly till homogenous paste obtain.
- (3) Apply mixed paste with suitable application blade.
- (4) Remove spillage material with damp sponge/cloth.

**Shelf Life :** 12 Month (Store in a off ground, dry area in factory sealed packaging, high humidity may reduce shelf life of product.)

[www.hibondchem.com](http://www.hibondchem.com)



**200 ml. , 1 Ltr.**

# EXCLUSIVE BONDING...



ADMIXER

# CEMENT TONIC-LW+

## Product description:

CEMENT TONIC LLW+ is a new generation synthetically manufactured, high water reducing admixture for concrete & plaster.



## Application:

Cement tonic lw+ is a designed to increase the strength of concrete & provides higher early and ultimate strengths.

**Pack Size :** 5 ltr, 20 ltr

**colour :** Yellowish light brown liquid

**How to use :** It is Use for waterproofing of concrete, sand-cement mortars, basements, roof slabs, screed, water retaining structures, suken slabs, terrace slabs, water tanks and sump tanks

**MIXING RATIO:** Add 200 ml HI-bond LW+ to 50 kg cement and 2-3 ltr Lw+ in 200 ltr. water mix.

**Shelf Life :** 12 Month (Store in a off ground, dry area in factory sealed packaging, high humidity may reduce shelf life of product.)

[www.hibondchem.com](http://www.hibondchem.com)



**5 ltr, 20 ltr.**

# EXCLUSIVE BONDING...



# CLANING TILES CLEANER

## Product description:

Tiles cleaner is a high quality rapid active and decreasing solution for use on tiles,bath tubs,wash basin and concrete etc.



## Application:

interior & exterior  
wall& floor

**Pack Size :** 1 ltr.

## Advantages:

Powerful formula  
Fast action  
Easy to apply  
Remove cement films  
Ideal for interior & exterior areas

## Fast action

## Note:

Do not use on surfaces that are not resistant to acids such as marble or terrazzo.

keep away from children.

## Coverage :

Coverage depende on the poposity of the surface stains, dilution etc.



**1 ltr.**

# EXCLUSIVE BONDING...



SPACERS

# TILES SPACERS

## Product description:

Tiles spacers allow you to achieve a consistent pattern when fixing wall/floor tiles and help to ensure that all tiles are laid equidistant from each other in order for the grout to then be applied.



**Available size:**

2mm,3mm,4mm,5mm

**Pack Size :** 100 pcs/pkd

# TILES EQUALIZER (LEVLAR KIT)

**Pack Size:** CLIP – 50 PCS/PKD

WEDGE – 50 PCS/PKD



# EXCLUSIVE BONDING...